

DOORS

LIGHT DUTY ROLL-UP



1900 SERIES

The 1900 Series commercial-style roll-up door utilizes 9-1/2" drums instead of 12" drums, which allows it to operate quietly and requires less headroom during installation.

↑ **HEADROOM**
19" (THRU 8')
20" (8' TO 10')
↓ 20.5" (10' TO 14')

9-1/2"
DRUM

WARRANTY
40/35
FILM/CHALK-FADE




NOTE: The 1900 Series is not rated for wind loads.
Please see the 2500 Series, 3000 Series, or 5000 Series.


1900 SERIES

LIGHT DUTY ROLL-UP


INTERIOR ELEVATION

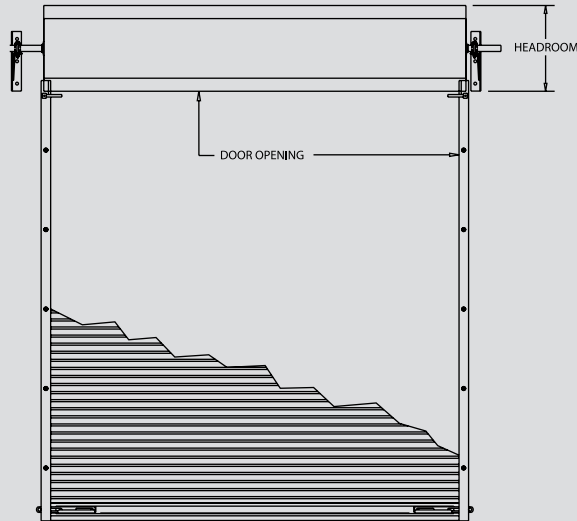


GUIDE DETAIL




DOOR ENGAGEMENT

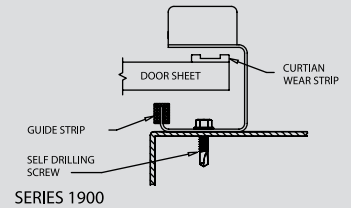


GUIDE MOUNTING



MASONRY MOUNT



STEEL MOUNT



WOOD MOUNT

CURTAIN

- 26-gauge galvanized, Grade 80 steel
- 5/8" ribbed corrugation
- Maximum opening size 12' x 14'
- Super-durable polyester paint

BOTTOM BAR

- 2" x 1-1/2" galvanized angles
- Bulb astragal
- Stainless steel nuts and bolts

DEAD AXLE-DRUM ASSEMBLY

- 1-5/8" O.D. steel axle, 16-gauge
- Pre-lubricated, enclosed springs
- Utilizes 9-1/2" drums
- Shielded steel ball bearings in drums

A.C.E. (ADVANCED CURTAIN ENGAGEMENT) GUIDE SYSTEM

- Galvanized steel
- Adjustable bolt on head stop
- Polyethylene wear strip
- Pre-punched holes for lock and attachment fasteners

HARDWARE

- Saddle clamps
- Slide locks, two per door
- Step plate; two per door
- 1/4" steel angle T-bracket

OPTIONS

- Chain hoist 4:1 reduction
- Vision panels
- Hood
- Steel mounting plates
- Available in more than 30 color options, subject to availability and varying lead times



NOTE: The 1900 Series is not rated for wind loads. Please see the 2500 Series, 3000 Series, or 5000 Series.

