

DOORS

HEAVY DUTY ROLL-UP



2400 SERIES

DBCI's 2400 Series is a heavy-duty sheet door suitable for warehouse and freight buildings. The 2400 Series has deep engagement guides, ensuring superior durability and strong, long-lasting performance.

↑ HEADROOM
19" (THRU 8')
20" (8' TO 10')
↓ 20.5" (10' TO 14')

12"
DRUM

WARRANTY
40/35
FILM/CHALK-FADE




The 2400 Series is wind rated up to 12' wide.
The pressure rating increases as the door width decreases.


2400 SERIES

HEAVY DUTY ROLL-UP


INTERIOR ELEVATION

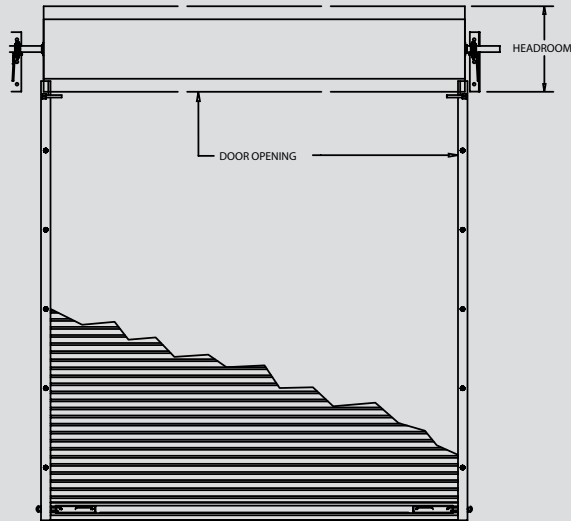


GUIDE DETAIL




DOOR ENGAGEMENT

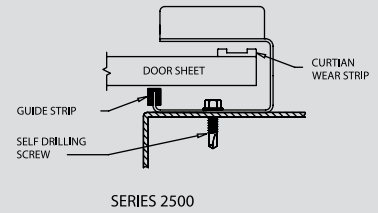


GUIDE MOUNTING



MASONRY MOUNT



STEEL MOUNT



WOOD MOUNT

CURTAIN

- 26-gauge galvanized, Grade 80 steel
- 5/8" ribbed corrugation
- Maximum opening size 12' x 14'
- Super-durable polyester paint

BOTTOM BAR

- 2" x 1-1/2" galvanized angles
- Bulb astragal
- Stainless steel nuts and bolts

AXLE-DRUM ASSEMBLY

- 1-5/16" O.D. steel axle, 14-gauge
- 11-gauge axle on doors over 10' wide
- Utilizes 9.5" drums
- Shielded steel ball bearings in drums
- Pre-lubricated, enclosed springs

A.C.E. (ADVANCED CURTAIN ENGAGEMENT) GUIDE SYSTEM

- 14-gauge galvanized steel
- Adjustable bolt on head stop
- Polyethylene wear strip
- Pre-punched holes for lock and attachment fasteners

HARDWARE

- Saddle clamps with set fasteners
- Slide locks, two per door
- Step plate; two per door
- 1/4" steel angle T-bracket
- Aluminum "T" shaped lead stop

OPTIONS

- Chain hoist 4:1 reduction
- Vision panels
- Hood
- Steel mounting plates
- Motor operated
- Available in more than 30 color options, subject to availability and varying lead times



The 2400 Series is wind rated up to 12' wide.
The pressure rating increases as the door width decreases.

